



*Stretch Wrapping Machine  
Model FO*

## Fully automatized wrapping machine for stretch film








### Advantages

- Very high packaging quality
- High product protection for various product types and dimensions
- Low energy consumption
- Simple loading of stretch film
- Easy installation and integration into an existing conveyor system
- Robust design for shift operations

### Construction

- Heavy duty steel frame with electronically controlled service door
- Robust ring design for high speed applications
- Film dispenser with mechanical pre-stretch up to 150%
- Spool carriage to control the film tension
- Film end control and alarm system indicating film break
- Automatic film clamping and cutting device
- Control desk with SPS & OP

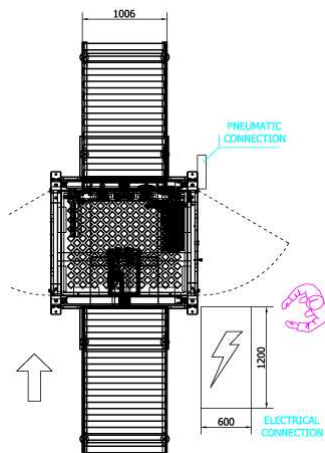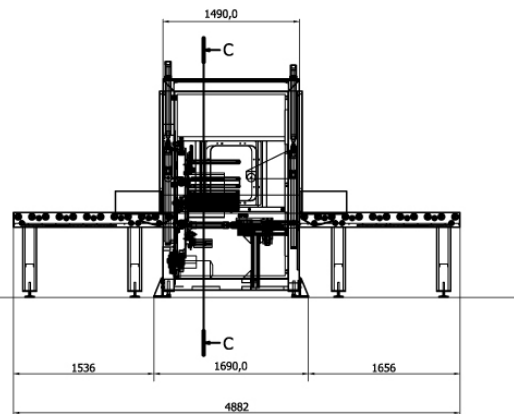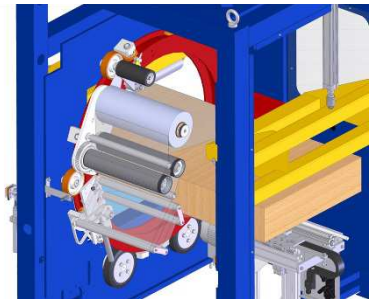

### Technical data

Ring size	1000 - 3200 mm
Rotation speed	up to 150 rpm / frequency controlled
Feed rate	up to 30 m/min.
Packaging material	PE stretch film / ID: 76 mm, OD: 250 mm
Width	125, 250 or 500 mm
Thickness	15 - 35 $\mu$
Programs	Spiral wrapping, banderoling, reinforced product tail wrapping, adjustable film overlapping
Power supply	400V / 50Hz
Pneumatic supply	6 bar

### Options

- Vertical and horizontal pressure roll to fix the product
- Top layer applicator
- Rotor height adjustment
- Bottom chain bridge to support and fix short packs